


**RapidAir****Coil Reels**

Series 15-25-40-60

Coil weight capacities from 1500 to 6000 lbs.
6", 12", 18" and 24" stock width capacities.
72" maximum coil O.D.
Single and double mandrel configurations.
Powered and non-powered models.

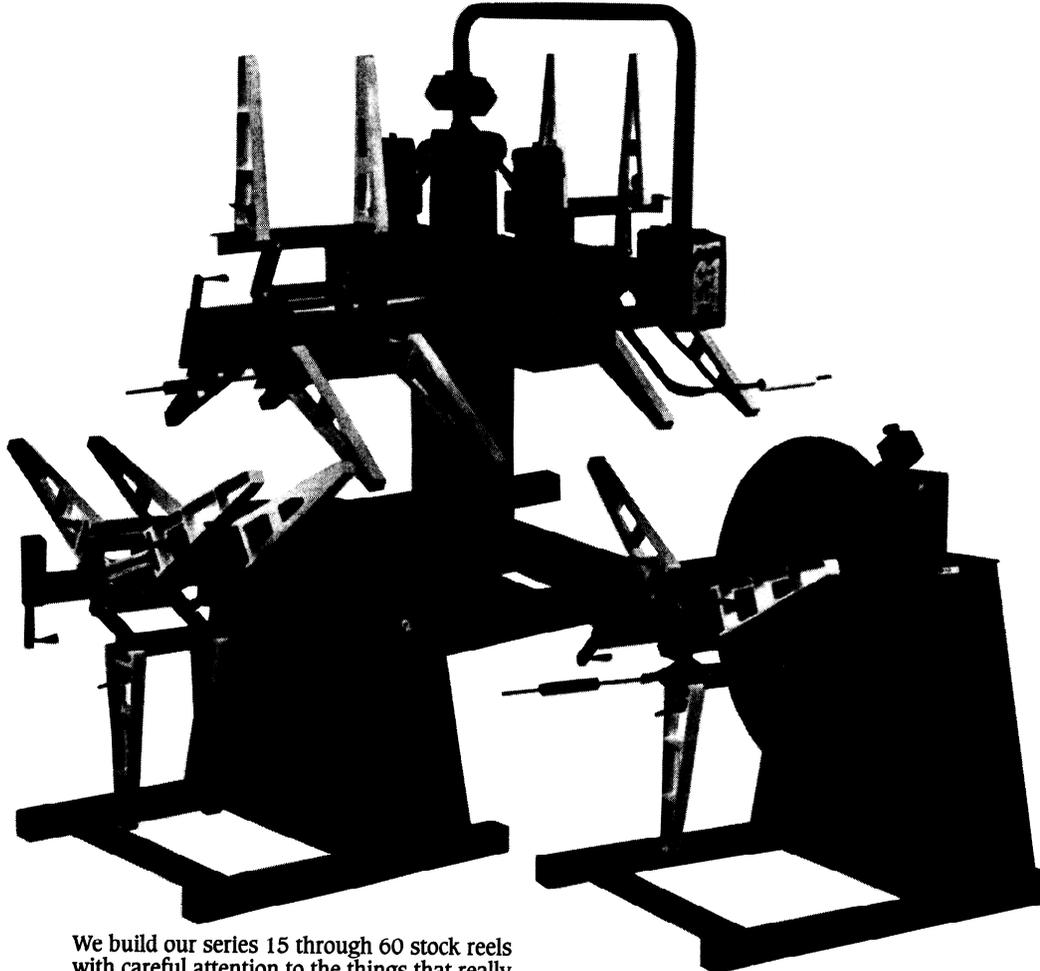

We build our series 15 through 60 stock reels with careful attention to the things that really matter for lasting durability. Like the brawny shafts with full bearing support to handle heavy coil loads day in and day out, the rugged coil centering arms, and the sturdy all steel cabinets and support bases. Plus, everything else we put into these reels is built rock solid in the Rapid-Air tradition.

The options and accessories for each of the 35 models enable you to configure a reel practically any way you want it for dependable payoff of coil stock.

Single or double mandrel reels

Depending on production volume requirements, you can choose a single or double mandrel reel. A double mandrel swiveling reel allows loading a new coil on one side while the

other side is paying off material. When the operational coil is depleted, the reel is swiveled 180° to bring a new coil into position.

Non-powered reels

Non-powered models can be employed when a straightener or other equipment provides the power to pull material off the coil. Brake options: Mechanical, pneumatic, or electric.

Powered reels

Both single and double mandrel reels are available as powered models utilizing variable speed DC motors as standard. Loop control options: Standard is a proportional electronic system with dancer sensing arm; options are an ultrasonic non-contact loop control or an electronic hi-low touch system control.