




METRIC
READY-MET

READY-MET In stock lengths

- Our highest production bender.
- Custom lengths up to 6 10 or 9 15 mm *long* available, see page 18.

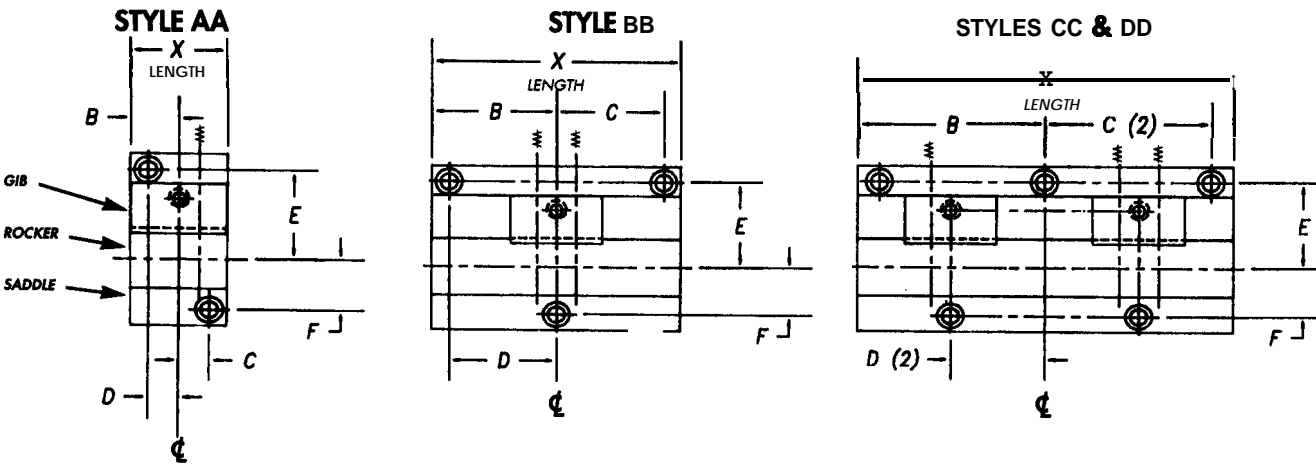

Mounting Hole Locations

All dimensions are in millimeters.

Hole patterns can be used by diemakers for similar length benders that do not come with mounting holes.

Model Callout	Length Style	X Length	B	C	D	E	F	SHCS size
RMC 62	AA	28.58	14.29	9.00	9.00	30.00	14.00	M4
	CC	88.90	44.45	38.46	38.46	30.00	14.00	M4
	DD	152.40	76.20	70.21	38.10	30.00	14.00	M4
RMC 100	AA	38.10	19.05	12.00	12.00	37.50	21.50	M6
	BB	101.60	50.80	44.25	44.25	37.50	21.50	M6
	CC	152.40	76.20	67.18	38.10	37.50	21.50	M6
	DD	228.60	114.30	105.31	57.15	37.50	21.50	M6
RMC 150	AA	50.80	25.40	17.00	17.00	50.00	30.00	M8
	BB	127.00	63.50	51.51	51.51	50.00	30.00	M8
	CC	203.20	101.60	86.59	50.80	50.00	30.00	M8
RMC 200	AA	63.50	31.750	21.50	21.50	60.00	37.50	M10
	BB	177.80	88.90	73.89	73.89	60.00	37.50	M10
RMC 250	AA	76.20	38.10	25.00	25.00	79.00	44.00	M12
	BB	177.80	88.90	70.89	70.89	79.00	44.00	M12
RMC 300	AA	88.90	44.45	32.50	32.50	92.50	57.00	M12
	BB	152.40	76.20	58.19	58.19	92.50	57.00	M12

All dimensions are in millimeters.

NOTE: this is an inch product, the same as READY-2000 on pages 6 to 8, except with metric mounting holes.

Tolerances Held

X = saddle length
+ .000mm / - .250mm;
+ .000" / - .010"

X = rocker length

+ .250mm / - .000mm;
+ .010" / - .000"

Screw locations held

± .127mm;
± .005"

Order Example:		
RMC	100	X = DD
READY Model Callout	Rocker Diameter 1"	Specify Length Bender