




# Single and Dual Swivel Coil Reels

Series 15-25-40-60

Specifications

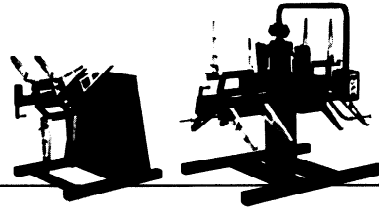

	Single Reels Model No.	Dual Swivel Reels Model No.	Max. Coil Weight*	Max. Coil Width	Max. Coil O.D.	Min. - Max. Coll I.D.	Std. D.C. Motor	Drag Brake Type
<b>Series 15</b> 1500 lb. capacity POWERED**	RA1506	RSA1506	1500 lbs.	6"	48"	14-22"	1/2 hp, 110v	—
	RA1512	RSA1512	1500 lbs.	12"	48"	14-22"	1/2 hp, 110v	—
<b>Series 15</b> 1500 lb. capacity NON-POWERED	RMA1506	RSMA1506	1500 lbs.	6"	48"	14-22"	—	Mech.
	RMA1512	RSMA1512	1500 lbs.	12"	48"	14-22"	—	Mech.
	RPA1506	RSPA1506	1500 lbs.	6"	48"	14-22"	—	Air
	RPA1512	RSPA1512	1500 lbs.	12"	48"	14-22"	—	Air
	REA1506	RSEA1506	1500 lbs.	6"	48"	14-22"	—	Elect.
	REA1512	RSEA1512	1500 lbs.	12"	48"	14-22"	—	Elect.
<b>Series 25</b> 2500 lb. capacity POWERED**	RA2506	RSA2506	2500 lbs.	6"	60"	16-24"	1 hp, 110v	—
	RA2512	RSA2512	2500 lbs.	12"	60"	16-24"	1 hp, 110v	—
	RA2518	RSA2518	2500 lbs.	18"	60"	16-24"	1 hp, 110v	—
<b>Series 25</b> 2500 lb. capacity NON-POWERED	RPA2506	RSPA2506	2500 lbs.	6"	60"	16-24"	—	Air
	RPA2512	RSPA2512	2500 lbs.	12"	60"	16-24"	—	Air
	RPA2518	RSPA2518	2500 lbs.	18"	60"	16-24"	—	Air
	REA2506	RSEA2506	2500 lbs.	6"	60"	16-24"	—	Elect.
	REA2512	RSEA2512	2500 lbs.	12"	60"	16-24"	—	Elect.
	REA2518	RSEA2518	2500 lbs.	18"	60"	16-24"	—	Elect.
<b>Series 40</b> 4000 lb. capacity POWERED**	RA4012	RSA4012	4000 lbs.	12"	60"	16-24"	1-1/2 hp, 110v	—
	RA4018	RSA4018	4000 lbs.	18"	60"	16-24"	1-1/2 hp, 110v	—
	RA4024	RSA4024	4000 lbs.	24"	60"	16-24"	1-1/2 hp, 110v	—
<b>Series 40</b> 4000 lb. capacity NON-POWERED	RPA4012	RSPA4012	4000 lbs.	12"	60"	16-24"	—	Air
	RPA4018	RSPA4018	4000 lbs.	18"	60"	16-24"	—	Air
	RPA4024	RSPA4024	4000 lbs.	24"	60"	16-24"	—	Air
	REA4012	RSEA4012	4000 lbs.	12"	60"	16-24"	—	Elect.
	REA4018	RSEA4018	4000 lbs.	18"	60"	16-24"	—	Elect.
	REA4024	RSEA4024	4000 lbs.	24"	60"	16-24"	—	Elect.
<b>Series 60</b> 6000 lb. capacity POWERED**	RA6012	RSA6012	6000 lbs.	12"	72"	18-25"	2 hp, 220v	—
	RA6018	RSA6018	6000 lbs.	18"	72"	18-25"	2 hp, 220v	—
	RA6024	RSA6024	6000 lbs.	24"	72"	18-25"	2 hp, 220v	—
<b>Series 60</b> 6000 lb. capacity NON-POWERED	RPA6012	RSPA6012	6000 lbs.	12"	72"	18-25"	—	Air
	RPA6018	RSPA6018	6000 lbs.	18"	72"	18-25"	—	Air
	RPA6024	RSPA6024	6000 lbs.	24"	72"	18-25"	—	Air
	REA6012	RSEA6012	6000 lbs.	12"	72"	18-25"	—	Elect.
	REA6018	RSEA6018	6000 lbs.	18"	72"	18-25"	—	Elect.
	REA6024	RSEA6024	6000 lbs.	24"	72"	18-25"	—	Elect.

THREE-ARM MANDREL WITH MANUAL EXPANSION IS STANDARD ON ALL MODELS.

\*WEIGHT CAPACITY LISTED APPLIES TO EACH MANDREL FOR DUAL SWIVEL REELS.

ELECTRICAL INPUT REQUIRED FOR POWERED MODELS IS SINGLE PHASE A.C., 50/60 HZ.