

PIVOT PUNCH CORPORATION / SELECTIVE SERIES EJECTOR PUNCHES

STEEL: A2, M2 R/C W-62 PM WC 60-62 HEADS DRAWN WC 40-50

- A(E) A-2 STEEL
H(E) M-2 STEEL
P(E) PM STEEL
Y(E) M-2 STRAIGHT GRIND
PY(E) PM STRAIGHT GRIND

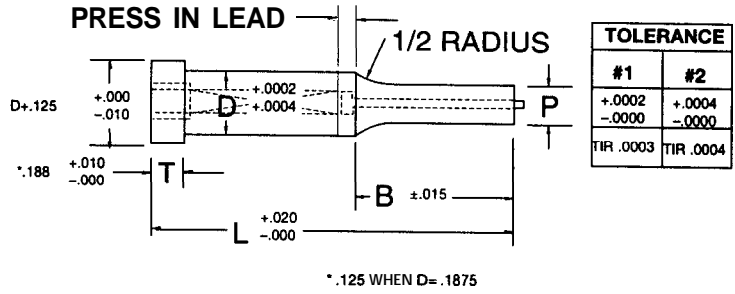
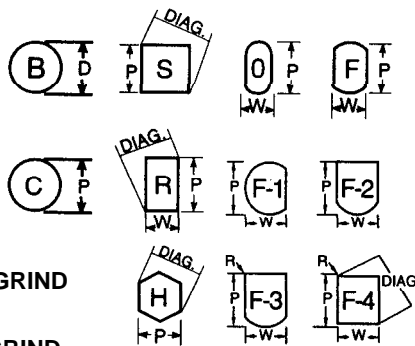


Table with columns: Shank (D, Code), Point Length B, Round (Min SP, Range P), Shape (Min SW, Min W, Max Diag), and Overall Length L (11.25 to 4.00). Rows are categorized by Point Length (0.50, 0.75, 1.00, 1.25, 1.50).

UNIVERSAL CODE: 1002 (SEE PAGE 176)

HOW TO ORDER

STEEL SHAPE WNCX DIA. CODE BODY OVERALL POINT LENGTH LENGTH UNLESS SPECIFIED TOL. #1 WILL BE FURNISHED