



PIVOT PUNCH CORPORATION / CATALOG INFORMATION




locking devices

All Locking Devices Shown
Tangent to Shank.


STANDARD LOCATION

Standard dowel and key locations are as illustrated below, located parallel to the longest dimension ("P") for positive alignment.

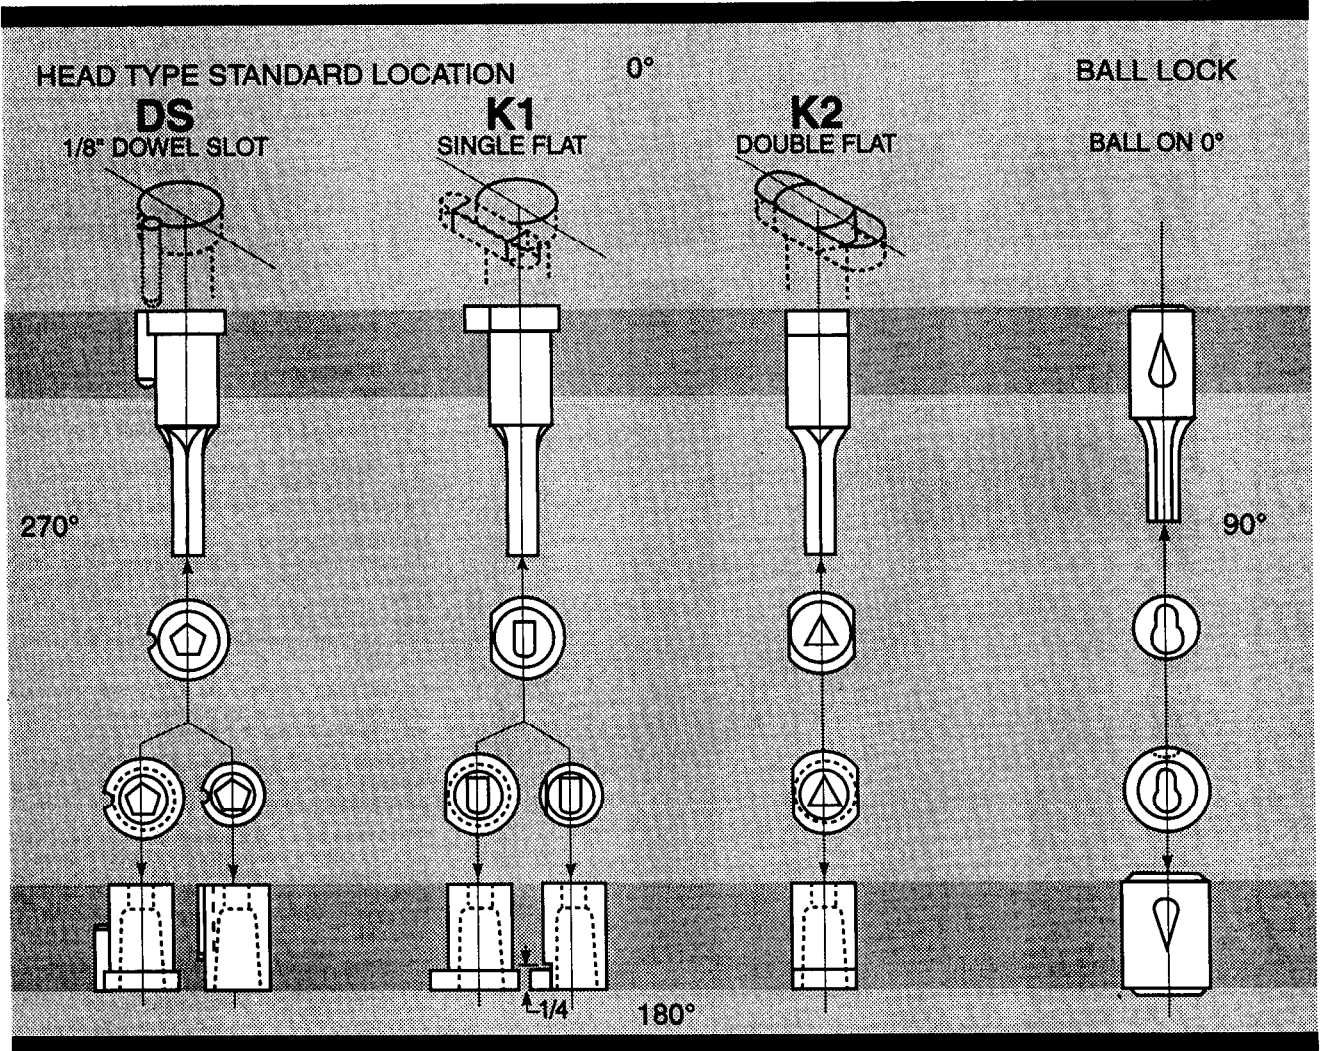


CUSTOM LOCATIONS

Dowel, key and ball locations other than shown are custom. Specify location desired in degrees clockwise from zero ° which is found at 12 o'clock on a line drawn to the longest dimension ("P") of the point shape (on Punches and Dies).

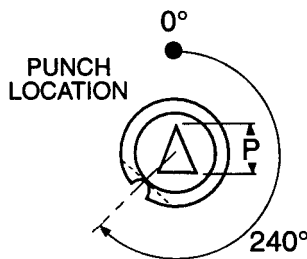

PIERCE END VIEW

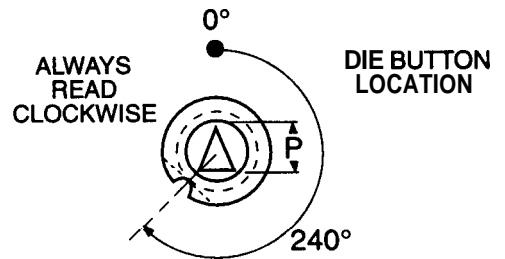

RELIEF END VIEW