



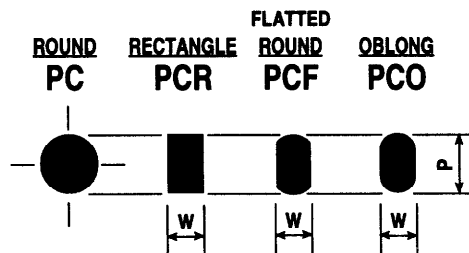

OBERG CARBIDE PUNCH & DIE / STANDARD TOLERANCE CARBIDE PUNCHES WITH CARBIDE HEAD AND HARDENED STEEL COLLAR

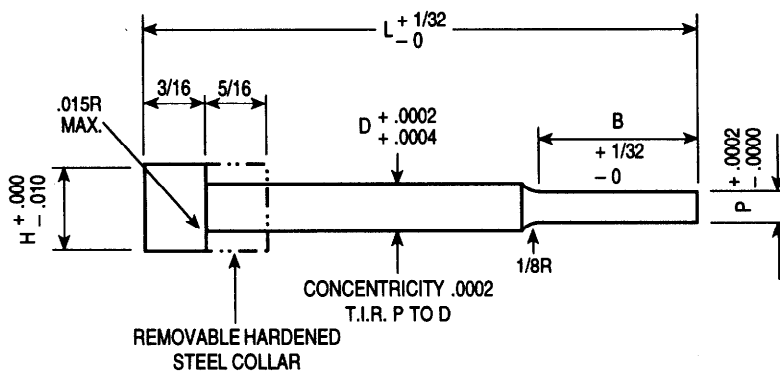

CATALOG NUMBER	D BODY DIAMETER	P POINT DIAMETER	B POINT LENGTH	H HEAD DIAMETER	L = LENGTH									
					2	2¼	2½	2¾	3	3¼	3½	3¾	4	
* 1PC-H18	.1875	.031 - .0609	5/16"	.250
* 2PC-H18	.1875	.061 - .1875	3/4"	.250
1PC-H25	.250	.060 - .1259	3/4"	.340
2PC-H25	.250	.126 - .250	7/8"	.340
1PC-H31	.3125	.125 - .2499	7/8"	.400
2PC-H31	.3125	.250 - .3125	7/8"	.400
1PC-H37	.375	.187 - .3139	7/8"	.460
2PC-H37	.375	.314 - .375	7/8"	.460
1PC-H43	.4375	.314 - .3749	7/8"	.562
2PC-H43	.4375	.375 - .4375	7/8"	.562
1PC-H50	.500	.375 - .4379	7/8"	.625
2PC-H50	.500	.438 - .500	7/8"	.625
1PC-H62	.625	.438 - .5299	7/8"	.750
2PC-H62	.625	.530 - .625	7/8"	.750
1PC-H75	.750	.530 - .6299	7/8"	.875
2PC-H75	.750	.630 - .750	7/8"	.875

NOTE: ANY DIMENSION OTHER THAN THOSE SHOWN QUOTED ON REQUEST


WHEN ORDERING SPECIFY:

Quantity	Catalog Number	L	P
3	1PC-H31	3"	.1260"

Quantity	Catalog Number	L	Point Dimensions
12	2PCF-H25	3½"	W = .1775" P = .2250"

* Head thickness = 1/8" with 3/8" steel collar.

All outside corners to be sharp unless otherwise specified by customer.

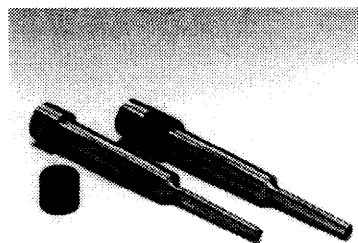

This catalog covers +.0002/+.0004" tolerance die components.
For +.00005/- .00000" tolerance die components, please refer to our precision catalog.