





**OBERG CARBIDE PUNCH & DIE / METRIC TOLERANCE**  
**CARBIDE DIE INSERTS WITH FULL LENGTH TAPER AND MACHINABLE STEEL SLEEVE HEAD**



CONCENTRICITY O.D. AND I.D., 0,005 T.I.R.  
\* TAPER IN "P" 0° - 9° PER SIDE

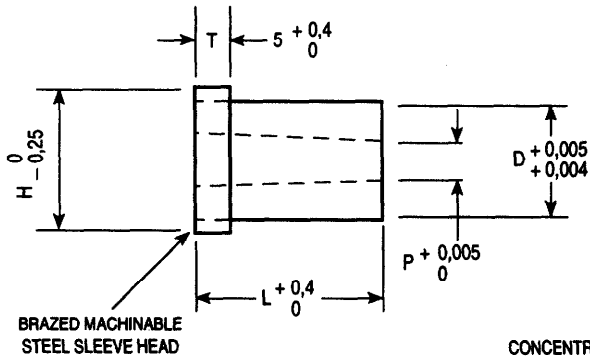


CATALOG NUMBER	D BODY DIAMETER	P INSIDE DIAMETER	H HEAD DIAMETER	L = LENGTH	
				25	32
1DTS-4M	4,0	0,75 - 2,00	7,00	•	•
1DTS-5M	5,0	0,75 - 2,50	8,00	•	•
1DTS-6M	6,0	0,75 - 3,50	9,00	•	•
1DTS-8M	8,0	0,75 - 5,25	11,00	•	•



NOTE: ANY DIMENSION OTHER THAN THOSE SHOWN QUOTED ON REQUEST

**WHEN ORDERING SPECIFY:**

Quantity	Catalog Number	L	P
2	1DTS-8M	25	4,50

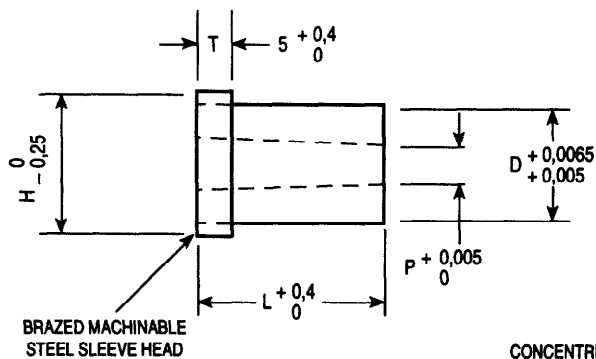

CONCENTRICITY O.D. AND I.D., 0,005 T.I.R.  
\* TAPER IN "P" 0° - 9° PER SIDE



CATALOG NUMBER	D BODY DIAMETER	P INSIDE DIAMETER	H HEAD DIAMETER	L = LENGTH	
				25	32
1DTS-10M	10,0	4,00 - 7,00	13,00	•	•
1DTS-13M	13,0	4,00 - 8,50	16,00	•	•
1DTS-16M	16,0	6,50 - 10,00	19,00	•	•
1DTS-20M	20,0	9,50 - 14,00	23,00	•	•
1DTS-25M	25,0	9,50 - 17,50	28,00	•	•

NOTE: ANY DIMENSION OTHER THAN THOSE SHOWN QUOTED ON REQUEST

**WHEN ORDERING SPECIFY:**

Quantity	Catalog Number	L	P
3	1DTS-25M	32	16,12