



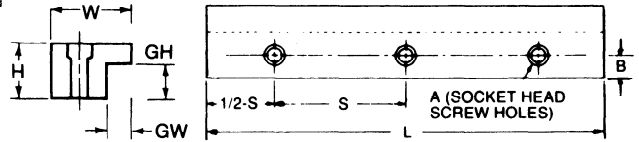


- Lamina Bronze bearing Surfaces on solid steel base.
- Quick, easy installation.
- Wide range of sizes, from inventory.
- Also available without holes as indicated.

- Plating thickness .008 - .010 (.2032mm - .2540 mm).
- One-piece construction with pre-drilled and counter bored screw holes, machined complete.
- Note: All GW & GH Dimension +.001 - .0000 (+.0254mm - .0000mm).

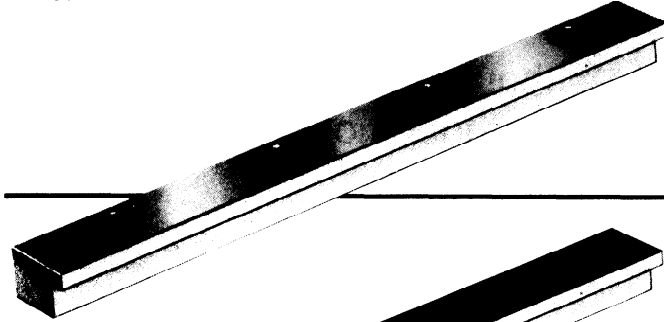


L-Gibs available without holes in seven sizes.

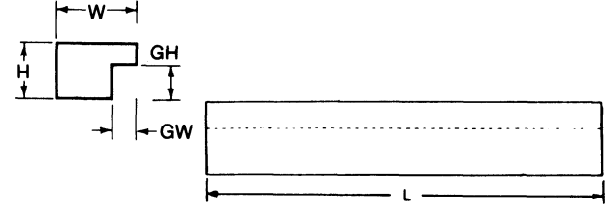


WHEN MACHINING CAUTION IS ADVISED TO USE SHARP TOOLS ONLY.

Self lubricating L-Gibs now available with and without mounting holes.

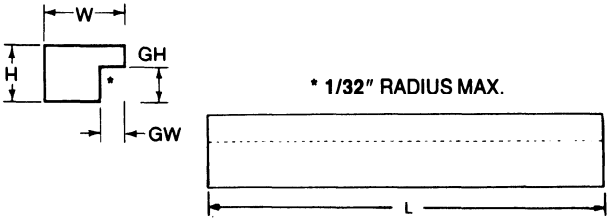

WHEN MACHINING CAUTION IS ADVISED TO USE SHARP TOOLS ONLY.

Lamina ^G V-GIBS ^{60°} Bronze Plate

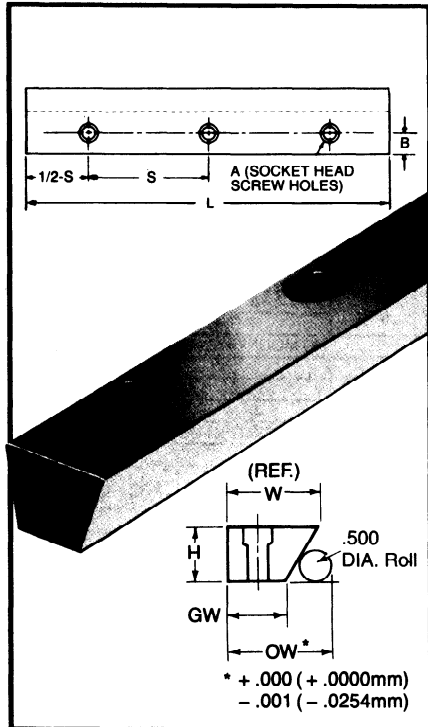

GIB WIDTH (GW)	OVER ROLL (OW)	REF WIDTH (W)	HEIGHT (H)	LENGTH (L)	PART NO.	S	NO. OF SCREW HOLES	A	B
.5625" (14.3mm)	1.2455" (31.6mm)	.923" (23.4mm)	.62" (15.9mm)	5.25 (133mm)	V-5-7-3	1.75 (44.5mm)	3	1/4" (M6)	.28 (7.1mm)
				7.0 (178mm)	V-5-7-4				
				8.75 (222mm)	V-5-7-5				
.7500" (19.1mm)	1.4330" (36.4mm)	1.182" (30.0mm)	.75" (19.1mm)	6.0 (152mm)	V-6-10-3	2.0 (50.8mm)	3	5/16" (M8)	.37 (9.5mm)
				8.0 (203mm)	V-6-10-4				
				10.0 (254mm)	V-6-10-5				
.8750" (22.2mm)	1.5580" (39.57mm)	1.379" (35.0mm)	.87" (22.2mm)	7.5 (190mm)	V-7-11-3	2.5 (63.5mm)	3	3/8" (M10)	.44 (11.1mm)
				10.0 (254mm)	V-7-11-4				
				12.5 (317mm)	V-7-11-5				
1.1250" (28.6mm)	1.8080" (42.9mm)	1.702" (43.2mm)	1.0" (25.4mm)	9.0 (228mm)	V-8-12-3	3.0 (76.2mm)	3	3/8" (M10)	.56 (14.3mm)
				12.0 (305mm)	V-8-12-4				
				15.0 (381mm)	V-8-12-5				
1.2500" (31.8mm)	1.9330" (49.10mm)	1.971" (50.1mm)	1.25" (31.8mm)	16.0 (406mm)	V-10-16-4	4.0 (101.6mm)	4	1/2" (M12)	.62 (15.9mm)
				24.0 (610mm)	V-10-16-6				
1.6250" (41.3mm)	2.3080" (58.62mm)	2.490" (63.3mm)	1.50" (38.1mm)	24.0 (610mm)	V-12-20-6	4.0 (101.6mm)	6	5/8" (M16)	.81 (20.6mm)
				32.0 (813mm)	V-12-20-8				
2.0000" (50.8mm)	2.6830" (68.15mm)	3.010" (76.5mm)	1.75" (44.5mm)	30.0 (762mm)	V-14-24-5	6.0 (152.4mm)	5	5/8" (M16)	1.0 (25.4mm)
				48.0 (1219mm)	V-14-24-8				
2.7500" (69.9mm)	3.4330" (87.20mm)	3.904" (99.2mm)	2.00" (50.8mm)	48.0 (1219mm)	V-16-32-8	6.0 (152.4mm)	8	3/4" (M20)	1.37 (34.9mm)