




MATIS

GRIPPER BUTTONS

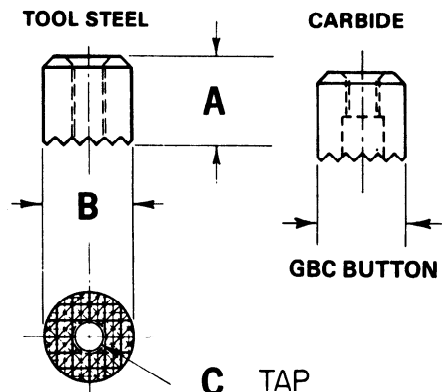


GRIPPER BUTTONS				
MODEL	A	B	C	CB-SCREW
GB-1	.500	.500	10-24	N/A
GB-2	.625	.750	1/4-20	N/A
GB-3	.750	1.000	3/8-16	N/A
GB-4	.875	1.250	1/2-13	N/A
GB-5	.625	.625	10-24	N/A
GBC-1	.498	.500	6-32	#6
GBC-2	.748	.625	10-32	#10
GBC-3	.998	.750	5/16-18	5/16
GBC-4	.1248	.875	3/8-16	3/8
GBC-5	.624	.625	6-32	#6

NOTE: AMCOR Gripper Buttons are hardened and Precision ground to specified diameters with tolerances of +.0002 to +.0007 and lengths are finished to specified dimensions with tolerances of -.000 to +.010.

PLUNGER PINS

ECONOMICAL, VERSATILE, STURDY SPRING PINS.
FOR USE AS OIL SEAL BREAKER PINS, STRIPPER
PINS AND MANY OTHER APPLICATIONS.

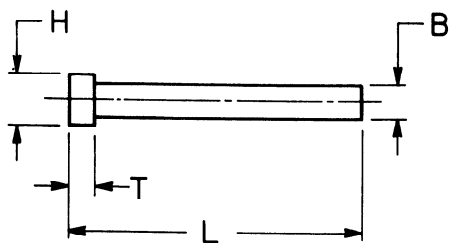


LENGTH OF PINS CAN
BE CUT TO SUIT APPLICATION
MADE OF CRS—CASE HARDENED AND GROUND

ITEM NO.	B BODY DIA.	H HEAD DIA.	T HEAD HGT.	L LENGTH
PP-1	3/32	3/16	1/8	1 1/2
PP-1A	1/8	1/4	1/8	1 1/2
PP-2	1/4	3/8	3/16	1 1/2
PP-2A	5/16	1/2	3/16	2 1/2
PP-3	3/8	1/2	3/16	2 1/2
PP-3A	7/16	11/16	1/4	2 1/2
PP-4	1/2	5/8	1/4	2 1/2

NOTE: DIAMETERS GIVEN ARE NOMINAL,
ACTUAL BODY DIAMETERS ARE
GROUND -.002 TO -.0025 UNDER NOR-
MAL SIZES. HEAD DIAMETERS ARE
-.003 TO -.007 UNDER SIZES GIVEN:

PRIMARY FINGER STOPS

Provided in thicker sizes — to eliminate the expense and bother of making the thicker sizes by hand as in the past.

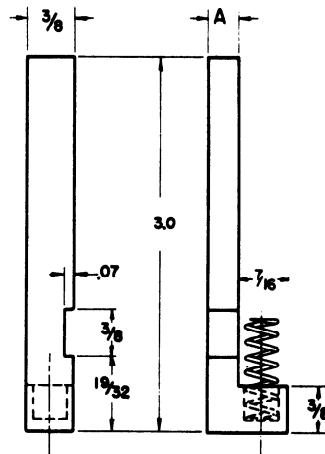

ORDER BY STOCK NUMBER

STOCK NO.	"A" DIMENSION
FS-2	1/8"
FS-3	3/16"
FS-4	1/4"
FS-5	5/16"
FS-6	3/8"

Packed Twelve in a Box Including Springs