





35 FPM DRIVE LOCATIONS & DIMENSIONS

Drive mounting for 35 fpm (available only in 115-1-60 or 230-3-60) and includes: motor, reducer, drive shaft, drive shaft collars, drive plate, guarding and mechanical drive components.

TOP MOUNT (OT) Single use only

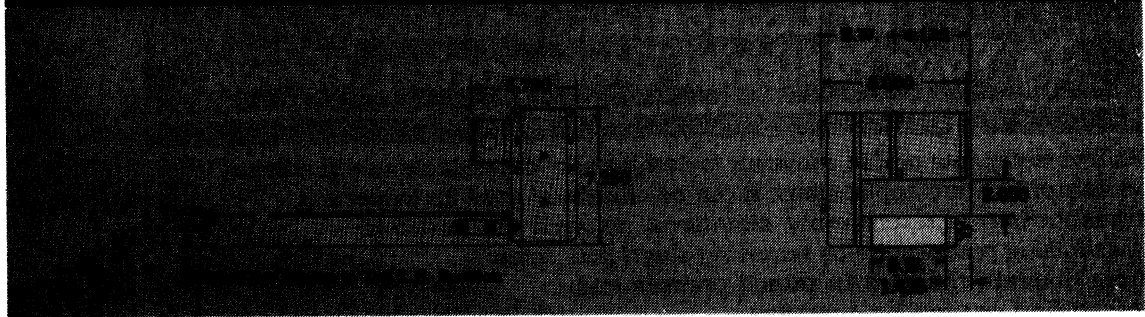

BOTTOM MOUNT (OB) Single use only

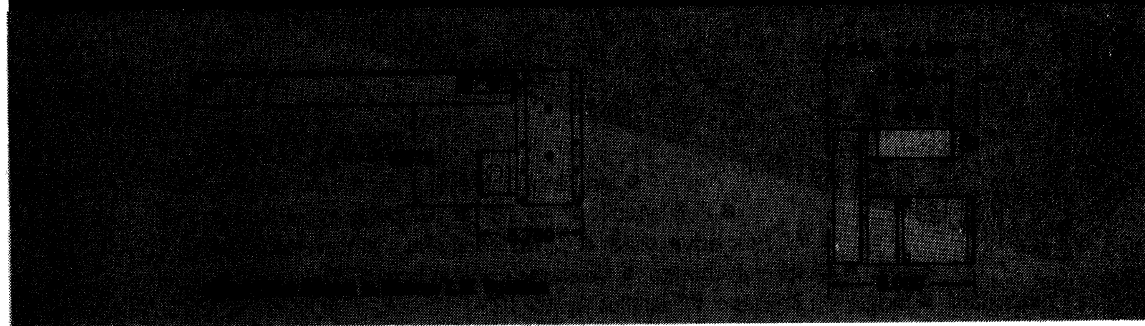

SIDE MOUNT (OS) Single use only



NOTE: Motor can be placed on either side of conveyor. Belt drive direction may be towards motor or away from motor.