





60 FPM DRIVE LOCATIONS & DIMENSIONS

Drive mounting for 60 fpm (available in both 115/220-1-60 or 230/460-3-60) and includes: motor, reducer, drive shaft, drive shaft collars, motor mount, guarding and mechanical drive components.

TOP MOUNT (BT) Single Use Only

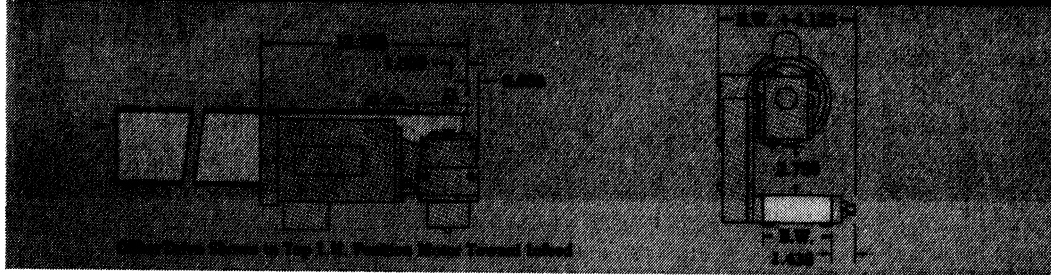


BOTTOM MOUNT (BB) Single Use Only

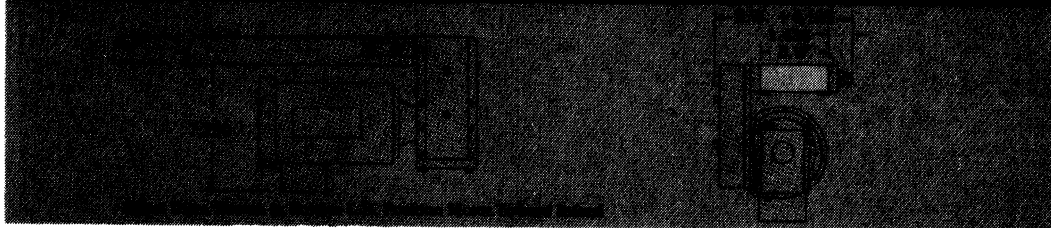

SIDE MOUNT (BS) Single/Multiple Use*



INDEPENDENT MOUNT (BI) Single/Multiple Use*

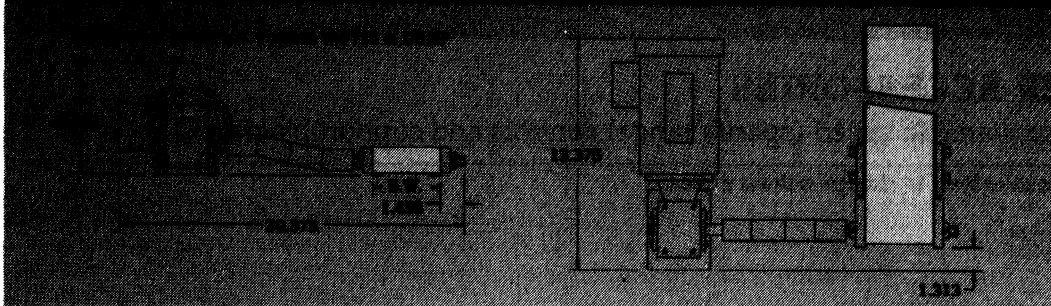

NOTE: Motor can be placed on either side of conveyor. Belt drive direction may be towards motor or away from motor.

*The drive dimensions will vary with multiple use.