



MATIS


SQUARE WIRE

CARBON STEEL DIE & FIXTURE SPRINGS

IN STOCK

INCHES X 25.4 = MM
LBS. X .454 = KG

• 12-INCH LENGTHS • PLAIN ENDS

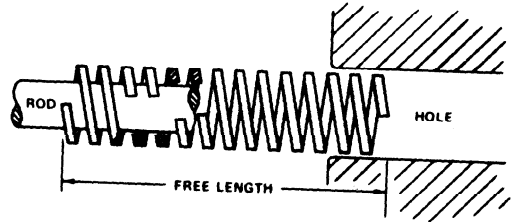

Hole Dia.	Rod Dia.	Stock No.	Wire Size	Space Between Coils	Max. Safe Load - Lbs.	Total Coils	Pounds Per Inch of Compression	Approx. Solid Height	No. Per Box
3/8									
	3/16	SR-0	1/16	3/64	25	111	12-1/2	7.50	12
7/16	1/4	SR-1A	1/16	5/64	40	86	9	5.67	12
1/2	1/4	SR-1B	3/32	5/64	100	70	42	7.10	12
9/16	5/16	SR-1	3/32	3/32	100	64-1/4	29	6.425	12
9/16	1/4	SR-4	1/8	1/16	245	64-1/4	118	9.05	12
11/16	7/16	SR-2	3/32	1/8	75	55	15-1/2	5.42	12
11/16	3/8	SR-5	1/8	3/32	214	55	60	7.52	12
11/16	5/16	SR-10	5/32	1/16	450	55	180	9.68	12
13/16	1/2	SR-6	3/32	1/8	65	55	35	6.87	12
13/16	1/2	SR-6	1/8	7/64	170	51-1/4	35	6.87	12
13/16	7/16	SR-12	5/32	7/64	335	45-1/4	175	7.79	12
13/16	3/8	SR-11	3/16	3/32	550	42-3/4	280	9.10	12
15/16	5/8	SR-7	1/8	1/8	145	48	21-1/2	6.35	12
15/16	9/16	SR-12	5/32	7/64	275	45-1/4	175	7.50	12
15/16	1/2	SR-17	3/16	3/32	425	42-3/4	175	8.75	12
1-1/16	3/4	SR-8	1/8	3/16	120	38-1/2	18	5.075	6
1-1/16	11/16	SR-13	5/32	11/64	245	36-3/4	50	6.15	6
1-1/16	5/8	SR-18	3/16	5/32	400	35	120	7.00	6
1-1/16	7/16	SR-23	1/4	7/64	1200	33-1/2	575	9.67	6
1-3/16	7/8	SR-9	1/8	1/4	100	32	14-1/2	4.20	6
1-3/16	13/16	SR-14	5/32	3/16	220	35	32	5.80	6
1-3/16	3/4	SR-19	3/16	3/16	350	32	90	6.30	6
1-3/16	9/16	SR-24	1/4	1/8	1000	32	380	9.05	6
1-5/16	15/16	SR-15	5/32	1/4	290	29-1/2	29	4.88	6
1-5/16	7/8	SR-20	3/16	3/16	300	32	65	6.25	6
1-5/16	11/16	SR-25	3/16	5/32	800	29-1/2	275	8.25	6
1-7/16	1 1/8	SR-21	5/16	5/16	270	24	60	4.63	6
1-7/16	13/16	SR-26	1/4	11/64	725	28-1/2	195	7.88	6
1-9/16	1-1/8	SR-22	3/16	5/16	240	24	42-1/2	4.59	6
1-9/16	15/16	SR-27	1/4	13/64	650	26-1/2	155	7.26	6
1-9/16	13/16	SR-31	5/16	3/16	1350	24	490	8.15	6
1-13/16	1-3/16	SR-28	1/4	11/32	575	20-1/2	115	5.52	6
1-13/16	1-1/16	SR-32	5/16	1/4	1150	21-1/2	305	7.425	6
2-1/16	1-7/16	SR-29	1/4	7/16	500	17-1/2	85	4.77	6
2-1/16	1-5/16	SR-33	5/16	19/64	1000	19-3/4	85	4.77	6
2-5/16	1-9/16	SR-30	5/16	13/32	850	16-3/4	60	6.79	6
2-5/16	1-11/16	SR-34	1/4	17/32	425	15-1/2	65	4.18	6
2-9/16	1-13/16	SR-35	5/16	7/16	750	16	115	5.45	6

USE *Lamina* PINS AND BRONZE-PLATED BUSHINGS

HOW TO ORDER-Order by stock number please.