



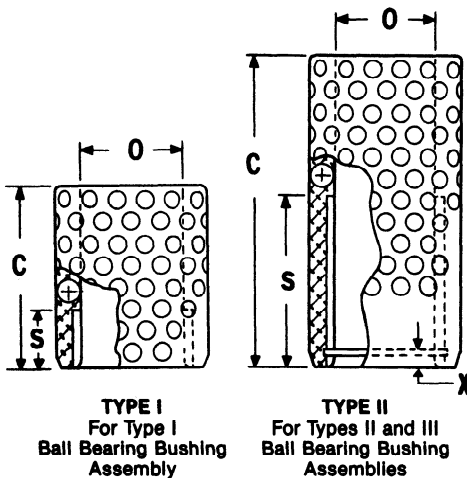

BALL BEARING CAGES

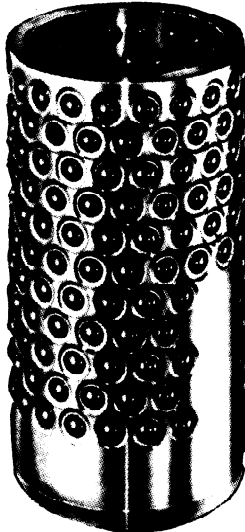

TYPE I
For Type I
Ball Bearing Bushing
Assembly

TYPE II
For Types II and III
Ball Bearing Bushing
Assemblies

Ball cages are made of heat treated aluminum alloy with tough, wear-resistant qualities. They are manufactured to rigid quality control standards to assure a smooth, burr-free finish that reduces friction and the possibility of scoring.

Ball bearings are vacuum degassed quality, fatigue resistant steel and are thoroughly inspected for roundness, smooth finish and dimensional tolerance.

Ball cages are mounted to drilled and tapped guide posts by a special washer assembly which permits cage to rotate freely around guide post, when not under pre-load.

Ball bearings are arranged in spiral pattern in the cage to minimize tracking or grooving and assure uniform wear.

Balls are retained by spinning for maximum security.

NOM. POST DIA.	TYPE I			TYPE II				
	O	C	S CATALOG NUMBER	C	S	X	CATALOG NUMBER	
1	1½	⅞	6-0806-82-1			⅜		
	2	1⅞	6-0808-82-1					
				2	1⅞			6-0808-82-2
				2½	1⅞			6-0810-82-2
				3	1⅞			6-0812-82-2
				3¼	1⅞			6-0813-82-2
1¼	1½	⅞	6-1006-82-1			⅜		
	2	1⅞	6-1008-82-1					
				2¾	1⅞			6-1011-82-2
				3¼	1⅞			6-1013-82-2
				3¾	1⅞			6-1015-82-2
				4	2⅞			6-1016-82-2
1½	2	1⅞	6-1208-82-1			¼		
	2½	1⅞	6-1210-82-1					
				2¾	1⅞			6-1211-82-2
				3½	1⅞			6-1214-82-2
				4¼	2⅞			6-1217-82-2
				4½	2⅞			6-1218-82-2
1¾	2½	1⅞	6-1410-82-1			¼		
	3	1⅞	6-1412-82-1					
				3¾	1⅞			6-1413-82-2
				4	2⅞			6-1416-82-2
				4¾	2⅞			6-1419-82-2
				5¼	2⅞			6-1421-82-2
2	3	1⅞	6-1612-82-1			¼		
	3½	1⅞	6-1614-82-1					
				3¾	1⅞			6-1615-82-2
				4½	2⅞			6-1618-82-2
				5¼	2⅞			6-1621-82-2
				5¾	3⅞			6-1623-82-2
2½	4	1⅞	6-2016-82-1			⅜		
				5¾	3			6-1624-82-2
				6	3⅞			6-1626-82-2
				6½	3⅞			6-1628-82-2
				7	4⅞			6-1630-82-2
				7½	4⅞			
3	4	1⅞	6-2416-82-1			⅜		
				5¾	3			6-2023-82-2
				6½	3⅞			6-2026-82-2
				7¼	3¾			6-2029-82-2
				7¾	4¼			6-2031-82-2
				8¼	4¾			6-2033-82-2
3	4	1⅞	6-2416-82-1			⅜		
				8¾	4¾			6-2035-82-2
				5¾	3			6-2423-82-2
				6½	3⅞			6-2426-82-2
				7¼	3¾			6-2429-82-2
				7¾	4¼			6-2431-82-2
3	4	1⅞	6-2416-82-1			⅜		
				8¼	4¾			6-2433-82-2
				8¾	5¼			6-2435-82-2
				5¾	3			6-2423-82-2
				6½	3⅞			6-2426-82-2
				7¼	3¾			6-2429-82-2