



# PIVOT NYLON STRIPPERS

## NOMAR™ URAFLEX®

Pivot Nomar™ Strippers provide a completely closed end stripper which can be pierced or machined to match any punch shape. The nylon bearing material end cap offers a harder wear surface than the urethane body while retaining the advantages of its non-marring characteristics.


NOMAR™ URAFLEX® NYLON STRIPPERS provide a built-in press fit for all types of standard punch shanks.

Light Duty Nomar™ Strippers are recommended for stock up to 1/8" thick. Heavy Duty Nomar™ Strippers are for greater stripping and holding for stock to 1/4" thick. Extra Heavy Duty Nomar™ Strippers are for the ultimate in holding and stripping pressures and for stock thicknesses as great as 1/2" thick. See deflection chart for stripping pressures required and proper selection for maximum stripping power when tough to work materials are used.

### Special Nomar® Strippers-any size, any shape or thickness


Uraflex® and Nomar™ Nylon are available in various sizes, thicknesses and durometers including a variety of OD's and ID's. They can be thermo-bonded to almost any configuration or combination by our experienced custom finishing department.

Send prints for price and delivery.

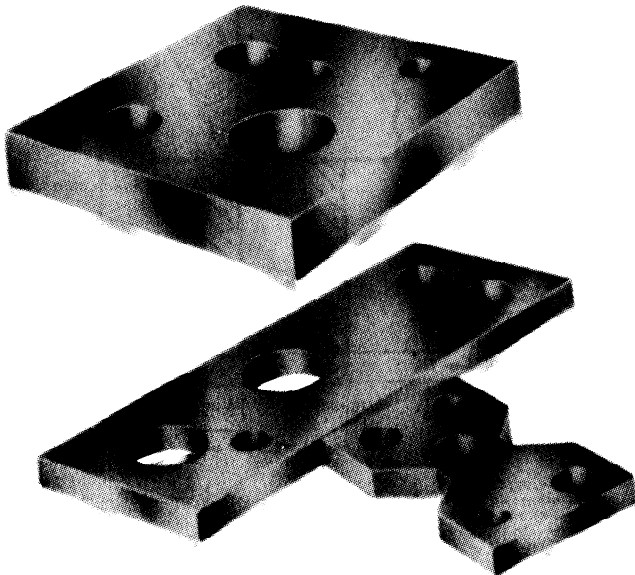

Custom Strippers are bounded only by the limits of imaginative engineering. Pivot Nomar™ Uraflex® is available in almost any length, width or thickness with durometer ranges from 60A to 75D.

Uraflex® or Nomar™ Nylon faces are mounted on steel stripper plates for lower noise level plus non-marring protection.

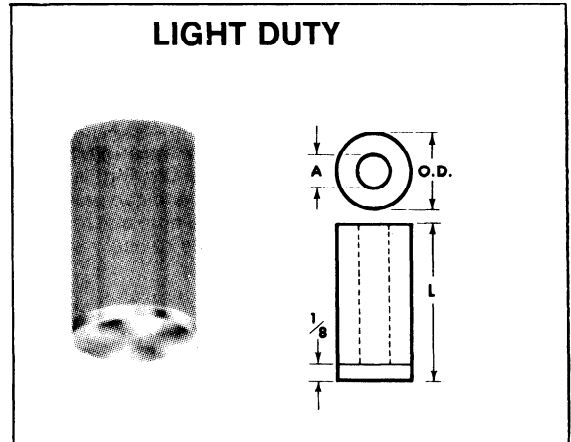

CATALOG NUMBER	FITS PUNCH SHANK (A)	OUT-SIDE DIA. (O.D.)	LENGTH* (L)	LOAD POUNDS REQUIRED TO DEFLECT**		
				1/8"	1/4"	3/8"
LN18	3/16	11/16	1-3/8	220	330	N.R.
	3/16	11/16	1-5/8	200	295	360
LN25	1/4	3/4	1-3/8	250	375	N.R.
	1/4	3/4	1-5/8	230	385	410
	1/4	3/4	1-7/8	210	305	385
	1/4	3/4	2-1/8	200	285	360
LN31	5/16	13/16	1-3/8	280	425	N.R.
	5/16	13/16	1-5/8	255	380	460
	5/16	13/16	1-7/8	235	345	435
	5/16	13/16	2-1/8	225	320	405
LN37	3/8	7/8	1-3/8	315	470	N.R.
	3/8	7/8	1-5/8	285	420	510
	3/8	7/8	1-7/8	260	385	480
	3/8	7/8	2-1/8	250	355	450
LN50	1/2	1	1-3/8	375	565	N.R.
	1/2	1	1-5/8	340	505	615
	1/2	1	1-7/8	310	460	575
	1/2	1	2-1/8	295	425	540
	1/2	1	2-3/8	280	400	505
LN62	5/8	1-1/8	1-3/8	440	660	N.R.
	5/8	1-1/8	1-5/8	400	590	715
	5/8	1-1/8	1-7/8	365	535	675
	5/8	1-1/8	2-1/8	345	500	630
	5/8	1-1/8	2-3/8	325	465	590
LN75	3/4	1-3/8	1-5/8	605	890	1085
	3/4	1-3/8	1-7/8	555	815	1020
	3/4	1-3/8	2-1/8	525	755	960
	3/4	1-3/8	2-3/8	495	705	890
	3/4	1-3/8	2-5/8	475	665	835
	3/4	1-3/8	2-7/8	435	630	790
	3/4	1-3/8	3-1/8	390	605	755
LN87	7/8	1-5/8	1-5/8	855	1260	1530
	7/8	1-5/8	1-7/8	780	1150	1445
	7/8	1-5/8	2-1/8	745	1065	1355
	7/8	1-5/8	2-3/8	700	995	1260
	7/8	1-5/8	2-5/8	670	940	1180
	7/8	1-5/8	2-7/8	610	890	1110
	7/8	1-5/8	3-1/8	550	855	1065
LN100	1	1-3/4	1-5/8	940	1385	1685
	1	1-3/4	1-7/8	860	1265	1590
	1	1-3/4	2-1/8	820	1175	1490
	1	1-3/4	2-3/8	770	1095	1385
	1	1-3/4	2-5/8	735	1030	1300
	1	1-3/4	2-7/8	670	980	1225
	1	1-3/4	3-1/8	605	940	1175

**WHEN ORDERING PLEASE SPECIFY:**

1. QUANTITY
  2. CATALOG NUMBER\*
  3. AND LENGTH
- LIGHT DUTY EXAMPLE: 5(QUANTITY)-LN62 1-7/8  
HEAVY DUTY EXAMPLE: 8(QUANTITY)-HN75 2  
EXTRA HEAVY DUTY EXAMPLE: 6(QUANTITY)-XHN87 1-3/4