




ECONOMY EJECTOR PINS

STYLE EC

Style No.	D Body Dia.	H Head Dia.	T Head Thick	L Lengths								
				4"			6"			10"		
				100	50 - 99	1 - 49	100	25 - 99	1 - 24	100	25 - 99	1 - 24
EC-06	1/16"	7/64"	3/64"							*	*	*
EC-07	5/64"	9/64"	3/64"							*	*	*
EC-09	3/32"	5/32"	5/64"									
EC-10	7/64"	3/16"	5/64"									
EC-12	1/8"	7/32"	3/32"									
EC-14	9/64"	1/4"	7/64"									
EC-15	5/32"	17/64"	1/8"									
EC-17	11/64"	5/16"	1/8"									
EC-18	3/16"	5/16"	9/64"									
EC-20	13/64"	11/32"	5/32"									
EC-21	7/32"	3/8"	5/32"									
EC-23	15/64"	13/32"	11/64"									
EC-25	1/4"	7/16"	3/16"									
EC-26	17/64"	7/16"	1/4"									
EC-28	9/32"	7/16"	1/4"									
EC-29	19/64"	1/2"	1/4"									
EC-31	5/16"	1/2"	1/4"									
EC-32	21/64"	9/16"	1/4"									
EC-34	11/32"	9/16"	1/4"									
EC-35	23/64"	5/8"	1/4"									
EC-37	3/8"	5/8"	1/4"									

Style EC

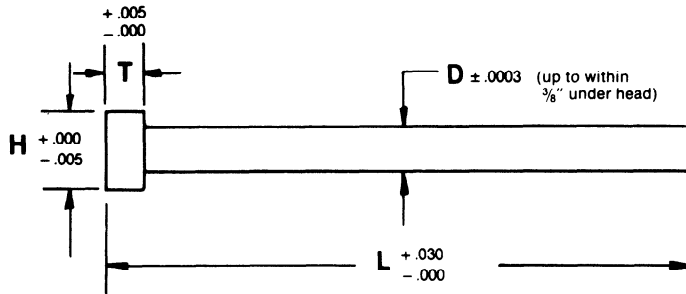

Specifications

- Oil Hardening Tool Steel
- Hardness Rc 58/60
- Heads Annealed Rc 42/45
- Ground O.D. ± 0.0003

How To Order: EXAMPLE

Qty.	Style	Dia.	× Length
200	EC-12	1/8"	× 4"